


RDEFL

RONDELLE DENTELLATE ESTERNE - FASCIA LARGA LARGE BAND WASHERS - EXTERNAL TEETH

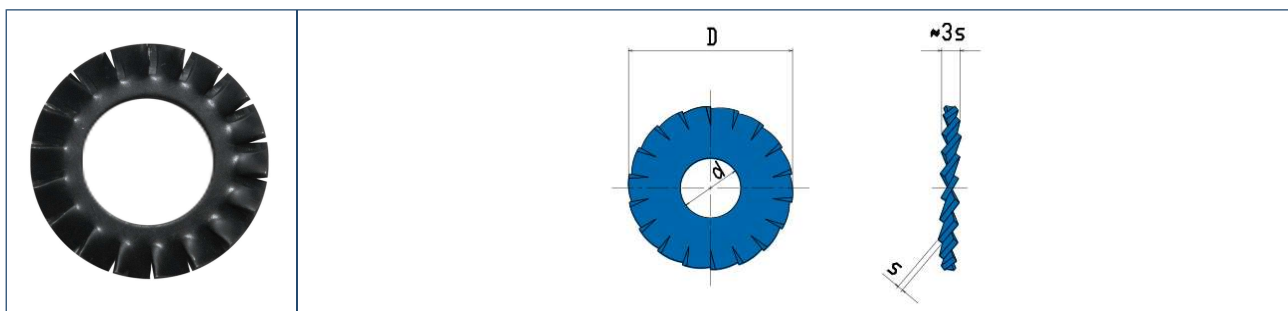

Dimensions in mm

| SIZE | WASHER DIMENSIONS | | | | | | | | SUPPLEMENTARY DATA | | WEIGHT |
|------|-------------------|-------|-----|-------|-----------|------|---------------|--------------|-------------------------------|---------|--------|
| | Screw mm | d H14 | tol | D h16 | tol | s | tol | no. of teeth | Load test Torsion torque (Nm) | Kg/1000 | |
| 3 | 3,20 | 0,300 | 0 | 7,00 | 0 - 0,900 | 0,40 | 0,020 - 0,020 | 10 | 1,40 | 0,080 | |
| 4 | 4,30 | 0,300 | 0 | 9,00 | 0 - 0,900 | 0,50 | 0,025 - 0,025 | 11 | 3,30 | 0,188 | |
| 5 | 5,30 | 0,300 | 0 | 11,00 | 0 - 1,100 | 0,60 | 0,025 - 0,025 | 12 | 6,70 | 0,348 | |
| 6 | 6,40 | 0,360 | 0 | 13,00 | 0 - 1,100 | 0,70 | 0,030 - 0,030 | 13 | 11,20 | 0,538 | |
| 7 | 7,30 | 0,360 | 0 | 14,00 | 0 - 1,100 | 0,70 | 0,030 - 0,030 | 14 | 18,00 | 0,579 | |
| 8 | 8,40 | 0,360 | 0 | 17,00 | 0 - 1,100 | 0,80 | 0,030 - 0,030 | 16 | 27,00 | 1,000 | |
| 10 | 10,50 | 0,430 | 0 | 20,50 | 0 - 1,300 | 1,00 | 0,030 - 0,030 | 16 | 53,00 | 1,767 | |
| 10 | 10,50 | 0,430 | 0 | 26,00 | 0 - 1,300 | 1,20 | 0,035 - 0,035 | 18 | 53,00 | 3,976 | |
| 10 | 10,50 | 0,430 | 0 | 33,00 | 0 - 1,600 | 1,40 | 0,400 - 0,040 | 18 | 53,00 | 7,980 | |
| 12 | 12,50 | 0,430 | 0 | 24,00 | 0 - 1,300 | 1,00 | 0,030 - 0,030 | 18 | 93,00 | 2,358 | |
| 14 | 14,50 | 0,430 | 0 | 26,00 | 0 - 1,300 | 1,20 | 0,035 - 0,035 | 18 | 145,00 | 3,177 | |

Informazioni tecniche - Technical information



Le rondelle dentellate esterne a fascia larga RDEFL sono particolarmente consigliate su superfici di appoggio piane, quando il diametro del foro di passaggio è sensibilmente superiore al diametro della vite.

MATERIALI

Acciaio per molle C60S (C60) - nastro
EN 10132 - 1/4 (DIN 17222)

DUREZZA

HV 350 ÷ 425, HRC 36 ÷ 43

FINITURE STANDARD

brunite e oliate

PACKAGING

sciolte in scatola

INFORMAZIONI AGGIUNTIVE

Su richiesta e per quantità/prezzi da concordare in fase di offerta, le rondelle RDEFL possono essere fornite con Zincatura Elettrolitica



Large band washers type RDEFL are particularly effective on flat bearing surfaces, when the diameter of the bore is significantly larger than the diameter of the screw.

MATERIALS

Spring steel C 60S (C60) - strip
EN 10132 - 1/4 (DIN 17222)

HARDNESS

HV 350 ÷ 425, HRC 36 ÷ 43

STANDARD FINISHES

self-finished and oiled

PACKAGING

loose in boxes

ADDITIONAL INFORMATION

Upon request and for quantities / prices to be established, large band washers RDEFL can be supplied with Electrolytic Zinc Plating