


# RDIFS

## RONDELLE DENTELLATE INTERNE - FASCIA STRETTA NARROW BAND WASHERS - INTERNAL TEETH

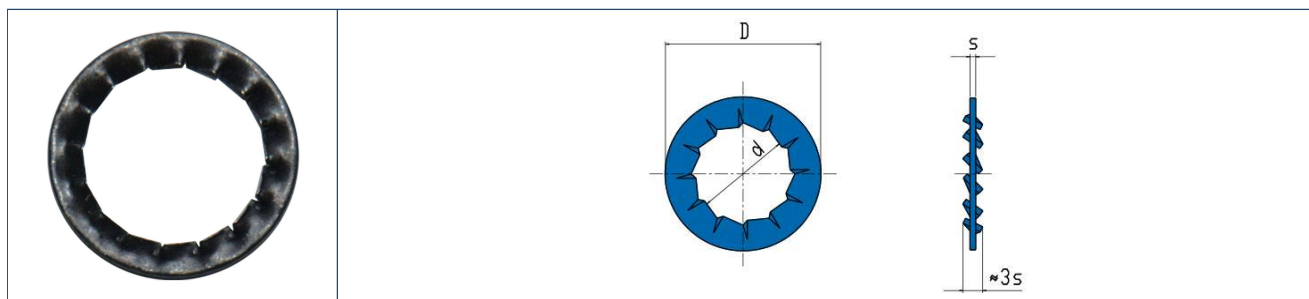

Dimensions in mm

SIZE		WASHER DIMENSIONS						SUPPLEMENTARY DATA		WEIGHT	
Screw mm	d H14	tol	0	D h16	tol	-0,430	s	tol	no. of teeth	Test load Torsion torque (Nm)	Kg/1000
10	10,20	0,250	0	14,50	0	-0,430	0,50	0,025 - 0,025	16	53	0,30

### Informazioni tecniche - Technical information



Le rondelle dentellate interne a fascia stretta RDIFS sono particolarmente consigliate in presenza di superfici di appoggio ridotte.

#### MATERIALI

Acciaio per molle C60S (C60) - nastro  
EN 10132 - 1/4 (DIN 17222)

#### DUREZZA

HV 350 ÷ 425, HRC 36 ÷ 43

#### FINITURE STANDARD

brunite e oliate

#### PACKAGING

sciolte in scatola

#### INFORMAZIONI AGGIUNTIVE

Confezionamento su richiesta: imballi industriali  
Finiture su richiesta: Fosfatazione, Zincatura elettrolitica



Narrow band washers RDIFS are particularly recommended for limited bearing surfaces.

#### MATERIALS

Spring steel C 60S (C60) - strip  
EN 10132 - 1/4 (DIN 17222)

#### HARDNESS

HV 350 ÷ 425, HRC 36 ÷ 43

#### STANDARD FINISHES

self-finished and oiled

#### PACKAGING

loose in boxes

#### ADDITIONAL INFORMATION

Packaging on request: Bulk  
Finishes on request: Phosphating, Electrolytic zinc